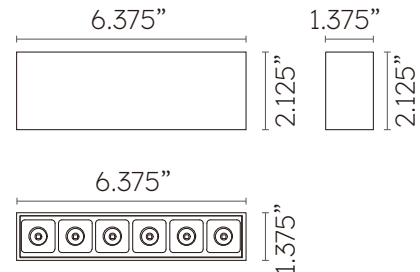


# MAGS 6" SPOT LINEAR

MAGS Series Light Fixture. The fixture engages with the track system electrically and mechanically via a magnetic connection and can be moved easily along the track. Model MAGS-D06 is a DRY-rated Magnetic Track, MicroSpot Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and contains 6 lights, using a total of 8 watts. Delivering 520 lumens using an Osram LED module with >90 CRI. Choose 12, 34, or 48 Degree beam spreads, and choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver (sold separately). Fixture Dimensions are 2.125 inches tall x 6.375 inches wide x 1.375 inches deep.



## Model Number Configuration

D06

---

**Optics**

- D12 - 20°
- D34 - 34°
- D48 - 48°

--

**CCT**

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

--

**Finish**

- BL - Black
- WH - White

## Electrical

<b>Voltage</b>	24V
<b>Dimming</b>	Driver dependent
<b>Power</b>	8W
<b>Lumens</b>	520
<b>Power factor</b>	N/A

## Environmental

<b>CRI</b>	>90
<b>Environment</b>	Dry
<b>Light Source</b>	LED
<b>Chip</b>	Osram
<b>Life rating</b>	N/A
<b>Listings</b>	C-ETL Listed to UL1598

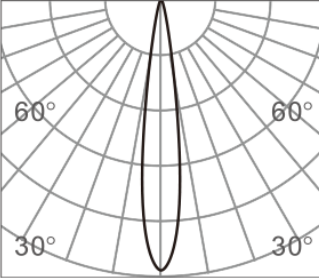
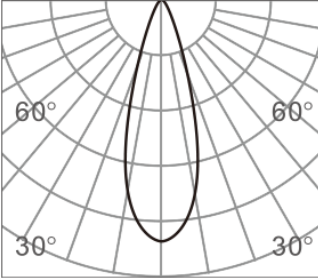
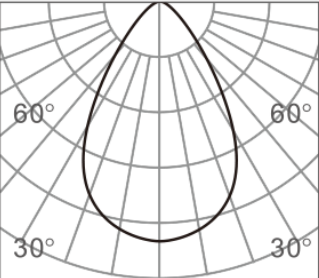
## Mechanical

<b>Installation</b>	N/A
<b>Cord Legth</b>	N/A
<b>Dimensions</b>	6.375"L x 1.375"W x 2.125"H
<b>Weight</b>	.73 lbs
<b>Material</b>	Aluminum
<b>Finish</b>	Powder Coated

## Driver Options

<b>Driver code</b>	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

## Photometric and Light Distribution

D12		D34																																					
<p><b>12°</b></p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>5723</td><td>Φ0.21</td></tr> <tr><td>2</td><td>1431</td><td>Φ0.42</td></tr> <tr><td>3</td><td>635</td><td>Φ0.63</td></tr> <tr><td>4</td><td>357</td><td>Φ0.84</td></tr> <tr><td>5</td><td>228</td><td>Φ1.05</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	5723	Φ0.21	2	1431	Φ0.42	3	635	Φ0.63	4	357	Φ0.84	5	228	Φ1.05	<p><b>34°</b></p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1807</td><td>Φ0.63</td></tr> <tr><td>2</td><td>451</td><td>Φ1.26</td></tr> <tr><td>3</td><td>200</td><td>Φ1.89</td></tr> <tr><td>4</td><td>112</td><td>Φ2.52</td></tr> <tr><td>5</td><td>72</td><td>Φ3.15</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	1807	Φ0.63	2	451	Φ1.26	3	200	Φ1.89	4	112	Φ2.52	5	72	Φ3.15
h(m)	E(lx)	Φ(m)																																					
1	5723	Φ0.21																																					
2	1431	Φ0.42																																					
3	635	Φ0.63																																					
4	357	Φ0.84																																					
5	228	Φ1.05																																					
h(m)	E(lx)	Φ(m)																																					
1	1807	Φ0.63																																					
2	451	Φ1.26																																					
3	200	Φ1.89																																					
4	112	Φ2.52																																					
5	72	Φ3.15																																					
<p><b>D48</b></p> <p><b>48°</b></p> 		<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1287</td><td>Φ0.79</td></tr> <tr><td>2</td><td>321</td><td>Φ1.58</td></tr> <tr><td>3</td><td>143</td><td>Φ2.37</td></tr> <tr><td>4</td><td>80</td><td>Φ3.16</td></tr> <tr><td>5</td><td>51</td><td>Φ3.95</td></tr> </tbody> </table>		h(m)	E(lx)	Φ(m)	1	1287	Φ0.79	2	321	Φ1.58	3	143	Φ2.37	4	80	Φ3.16	5	51	Φ3.95																		
h(m)	E(lx)	Φ(m)																																					
1	1287	Φ0.79																																					
2	321	Φ1.58																																					
3	143	Φ2.37																																					
4	80	Φ3.16																																					
5	51	Φ3.95																																					