


# MAGS 6" DIFFUSED CURVED

MAGS Series Light Fixture. Fixture engages with track system electrically and mechanically via magnetic connection and can be easily moved along the track. Model MAGS-L16CIRC is a DRY-rated Magnetic Track, Curved, Lensed Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and consumes a total of 7 watts, Diffuse Lens delivering 300 lumens using an Osram LEDModule with >90 CRI. Choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver needed. Fixture Dimensions are 2.25 inches tall x 7.5 inches wide x 1.25 inches deep.

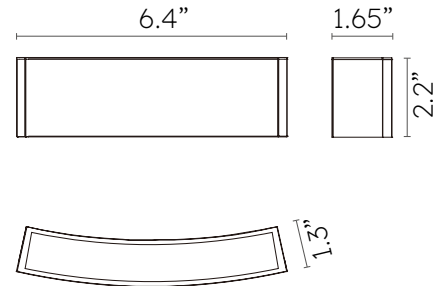

## Model Number Configuration

### L16CIRC

---

#### Optics

DIF - Diffuse

--

#### CCT

27 - 2700K

30 - 3000K

35 - 3500K

40 - 4000K

--

#### Finish

BL - Black

WH - White

## Electrical

<b>Voltage</b>	24V
<b>Dimming</b>	Driver dependent
<b>Power</b>	7W
<b>Lumens</b>	300
<b>Power factor</b>	N/A

## Environmental

<b>CRI</b>	>90
<b>Environment</b>	Dry
<b>Light Source</b>	LED
<b>Chip</b>	Osram
<b>Life rating</b>	N/A
<b>Listings</b>	C-ETL Listed to UL1598

## Mechanical

<b>Installation</b>	N/A
<b>Cord Legth</b>	N/A
<b>Dimensions</b>	7.5"L x 1.25"W x 2.25"H
<b>Weight</b>	.97 lbs
<b>Material</b>	Aluminum and polycarbonate
<b>Finish</b>	Powder Coated


## Driver Options

<b>Driver code</b>	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

**Photometric and Light Distribution**

**DIF**

**Diffuse**



h(m)	E(lx)	Φ(m)
1	182	Φ2.56
2	45	Φ5.12
3	20	Φ7.68
4	11	Φ10.24
5	7	Φ12.80