


MAGS 6" DIFFUSED CURVED

MAGS Series Light Fixture. Fixture engages with track system electrically and mechanically via magnetic connection and can be easily moved along the track. Model MAGS-L16CIRC is a DRY-rated Magnetic Track, Curved, Lensed Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and consumes a total of 7 watts, Diffuse Lens delivering 300 lumens using an Osram LEDModule with >90 CRI. Choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver needed. Fixture Dimensions are 2.25 inches tall x 7.5 inches wide x 1.25 inches deep.

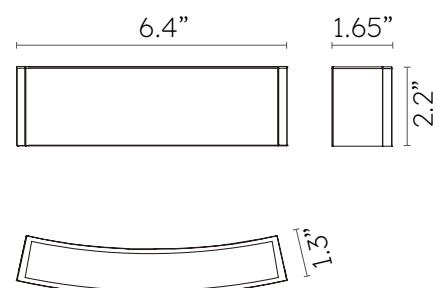

Model Number Configuration

L16CIRC	---	---	---
Optics	CCT	Finish	
<input type="checkbox"/> DIF - Diffuse	<input type="checkbox"/> 27 - 2700K	<input type="checkbox"/> BL - Black	
	<input type="checkbox"/> 30 - 3000K	<input type="checkbox"/> WH - White	
	<input type="checkbox"/> 35 - 3500K		
	<input type="checkbox"/> 40 - 4000K		

Electrical

Voltage	24V
Dimming	Driver dependent
Power	7W
Lumens	300
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Osram
Life rating	N/A
Listings	C-ETL Listed to UL1598

Mechanical

Installation	N/A
Cord Length	N/A
Dimensions	7.5" L x 1.25" W x 2.25" H
Weight	.97 lbs
Material	Aluminum and polycarbonate
Finish	Powder Coated


Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

Photometric and Light Distribution

DIF

Diffuse



h(m)	E(lx)	Φ(m)
1	182	Φ2.56
2	45	Φ5.12
3	20	Φ7.68
4	11	Φ10.24
5	7	Φ12.80