


MAGS 6" DIFFUSED LINEAR

MAGS Series Light Fixture. Fixture engages with track system electrically and mechanically via magnetic connection and can be easily moved along the track. Model MAGS-L16 is a DRY rated Magnetic Track, Linear Lensed Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and consumes a total of 8 watts, Diffuse Lens delivering 420 lumens using a Osram LEDModule with >90 CRI. Choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver needed. Fixture Dimensions are 2.125 inches tall x 6.375 inches wide x 1.375 inches deep.

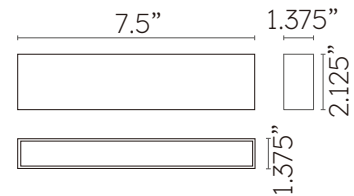

Model Number Configuration

L16

Optics

DIF - Diffuse

--

CCT

27 - 2700K

30 - 3000K

35 - 3500K

40 - 4000K

--

Finish

BL - Black

WH - White

Electrical

Voltage	24V
Dimming	Driver dependent
Power	8W
Lumens	420
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Osram
Life rating	N/A
Listings	C-ETL Listed to UL1598

Mechanical

Installation	N/A
Cord Legth	N/A
Dimensions	7.5"L x 1.375"W x 2.125"H
Weight	.68 lbs
Material	Aluminum and polycarbonate
Finish	Powder Coated


Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

Photometric and Light Distribution

DIF

Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30