


# MAGS 12" DIFFUSED LINEAR

MAGS Series Light Fixture. Fixture engages with track system electrically and mechanically via magnetic connection and can be easily moved along the track. Model MAGS-L32 is a DRY rated Magnetic Track, Linear Lensed Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and consumes a total of 16 watts, Diffuse Lens delivering 660 lumens using an Osram LEDModule with >90 CRI. Choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver needed. Fixture Dimensions are 2.125 inches tall x 12.625 inches wide x 1.375 inches deep.

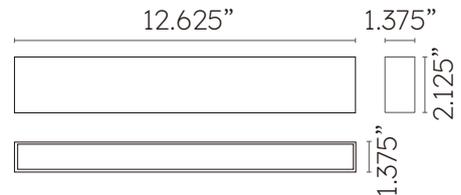

## Model Number Configuration

**L32**

---

**Optics**
 DIF - Diffuse

--

**CCT**
 27 - 2700K

 30 - 3000K

 35 - 3500K

 40 - 4000K

--

**Finish**
 BL - Black

 WH - White

## Electrical

|                     |                  |
|---------------------|------------------|
| <b>Voltage</b>      | 24V              |
| <b>Dimming</b>      | Driver dependent |
| <b>Power</b>        | 16W              |
| <b>Lumens</b>       | 660              |
| <b>Power factor</b> | N/A              |

## Environmental

|                     |                        |
|---------------------|------------------------|
| <b>CRI</b>          | >90                    |
| <b>Environment</b>  | Dry                    |
| <b>Light Source</b> | LED                    |
| <b>Chip</b>         | Osram                  |
| <b>Life rating</b>  | N/A                    |
| <b>Listings</b>     | C-ETL Listed to UL1598 |

## Mechanical

|                     |                              |
|---------------------|------------------------------|
| <b>Installation</b> | N/A                          |
| <b>Cord Legth</b>   | N/A                          |
| <b>Dimensions</b>   | 12.625"L x 1.375"D x 2.125"H |
| <b>Weight</b>       | 1.19 lbs                     |
| <b>Material</b>     | Aluminum and polycarbonate   |
| <b>Finish</b>       | Powder Coated                |


## Driver Options

|                    |  |
|--------------------|--|
| <b>Driver code</b> | PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. |
|--------------------|--|

**Photometric and Light Distribution**

**DIF**

**Diffuse**



| h(m) | E(lx) | Φ(m)   |
|------|-------|--------|
| 1    | 344   | Φ2.47  |
| 2    | 86    | Φ4.94  |
| 3    | 38    | Φ7.41  |
| 4    | 21    | Φ9.88  |
| 5    | 13    | Φ12.35 |