




# MAGS Ø1.4" PENDANT

MAGS Series pendant light fixture. Fixture engages with track system electrically and mechanically via a magnetic connection and can be easily moved along the track. Model MAGS-P35R is a DRY rated cylindrical pendant for Magnetic Track. Aluminum pendant with black or white painted finish. This Light Fixture is CETL listed and contains 1 lights, total of 5 watts, delivering 360 lumens using a Osram LEDModule with >90 CRI. Choice of 20, 30, 40 or 60 degree beam spreads. Choice of 2700K, 3000K, 4000K, 5000K, or 6500K CCT. Dimmable via 24V Volt Remote Driver, sold separately. Pendant Dimensions are 9.875 inches tall x 1.375 inches diameter with a 48 inch adjustable cord.





#### **Model Number Configuration**

P35R			
	Optics	ССТ	Finish
	□ D20 - 20°	☐ 27 - 2700K	☐ BL - Black
	□ D30 - 30°	□ 30 - 3000K	☐ WH - White
	□ D40 - 40°	☐ 35 - 3500K	
	□ D60 - 60°	☐ 40 - 4000K	



PROJECT NAME: FIXTURE TYPE:

Product sheet printed on: 2025-11-30 15:44:56

## **Electrical**

Voltage 24V

**Dimming** Driver dependent

 Power
 5W

 Lumens
 360

 Power factor
 N/A

#### **Environmental**

CRI >90
Environment Dry
Light Source LED
Chip Osram
Life rating N/A

**Listings** C-ETL Listed to UL1598

#### Mechanical

**Installation** N/A

**Cord Legth** 4' Standard Cord Length. Field Adjustable to shorter lengths. Longer Cord Length option available upon

request

**Dimensions** 1.37" Diameter x Overall heights: 12", 16", 22", 28 " or 34"9.875 inches tall x 1.375" dia x 9.875"H; 48"

adjustable cord

Weight .99 lbs

Material Aluminum

Finish Powder Coated

## **Driver Options**

**Driver code** PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100%

dimming. Up to 20 Small or 10 Large Pendants.



Product sheet printed on: 2025-11-30 15:44:56


# Photometric and Light Distribution

4

5

64

41

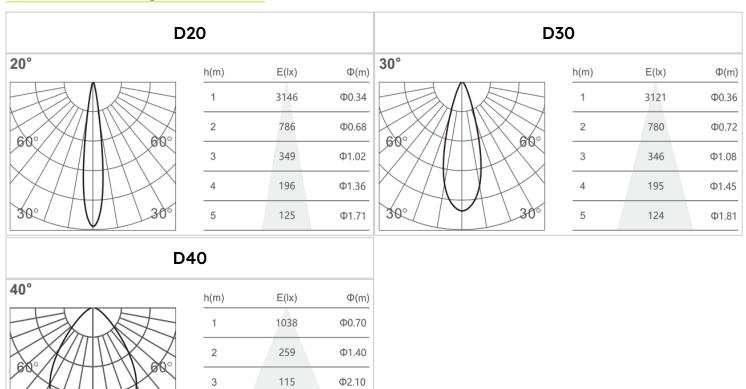

Ф2.80

Ф3.51