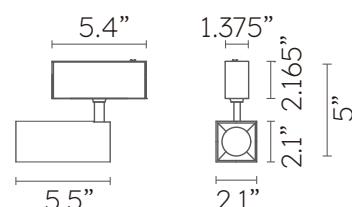


MAGS 2" SQUARE SPOTLIGHT

MAGS Series Magnetic Track, Adjustable Square Spotlight Light Fixture. Choice of black or white finish. CETL listed. 8.25 inches long x 2inch square. 90 degree tilt; 360 degree rotation. 1 Light, 10 watt, Osram LED delivering 870 lumens. +90 CRI. Choice of 18, 24, or 36 degree beam spreads. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver, sold separately.



Model Number Configuration

SQ50

Optics**CCT****Finish** D18 - 18° 27 - 2700K BL - Black D24 - 24° 30 - 3000K WH - White D36 - 36° 35 - 3500K 40 - 4000K

Electrical

Voltage	N/A
Dimming	Driver dependent
Power	10W
Lumens	870
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	N/A
Life rating	N/A
Listings	C-ETL Listed to UL1598


Mechanical

Installation	N/A
Cord Length	N/A
Dimensions	8.25" L x 2inch Square
Weight	N/A
Material	Aluminum
Finish	Powder Coated


Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. PS-60-ELV - 60W, 24V Power Supply. 120V Only with ELV Dimming to 10%. Fits in 4x4 Rectangular Junction Box.
--------------------	--


Photometric and Light Distribution

D18**18°**

h(m)	E(lx)	Φ(m)
1	4902	Φ0.32
2	1226	Φ0.65
3	544	Φ0.98
4	306	Φ1.31
5	196	Φ1.63

D24**24°**

h(m)	E(lx)	Φ(m)
1	4186	Φ0.39
2	1047	Φ0.79
3	465	Φ1.19
4	261	Φ1.58
5	167	Φ1.98

D36**36°**

h(m)	E(lx)	Φ(m)
1	2077	Φ0.64
2	519	Φ1.29
3	230	Φ1.94
4	129	Φ2.58
5	83	Φ3.23