



# MAGS MINI 19" SPOT LINEAR

MAGS Mini Series Light Fixture. The fixture engages with the track system electrically and mechanically via a magnetic connection and can be moved easily along the track. Model MAGS-ES-D24 is a DRY rated Magnetic Track, MicroSpot Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and contains 24 lights, uses a total of 24 watts. Downlight delivering 1875 lumens using an Osram LED Module with >90 CRI. Choose 20, 34, or 48-degree beam spreads, and choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver (sold separately). Fixture Dimensions are 19.33 inches long x .89 inches wide x .73 inches deep.

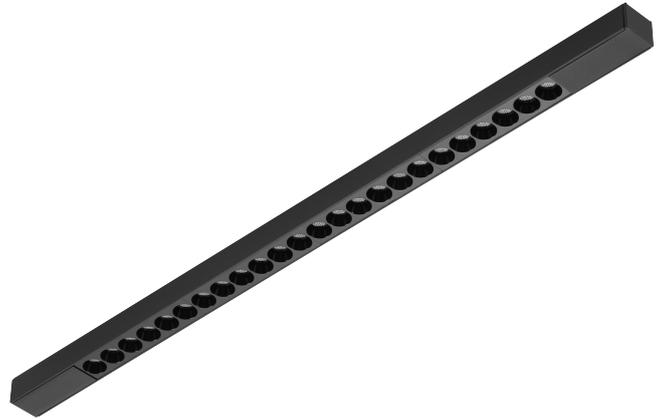

## Model Number Configuration

### MAGS-ES-D24

---

#### Optics

- D12 - 20°
- D34 - 34°
- D48 - 48°

--

#### CCT

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

--

#### Finish

- BL - Black
- WH - White

## Electrical

<b>Voltage</b>	24V
<b>Dimming</b>	Driver dependent
<b>Power</b>	24W
<b>Lumens</b>	1875
<b>Power factor</b>	N/A

## Environmental

<b>CRI</b>	>90
<b>Environment</b>	Dry
<b>Light Source</b>	LED
<b>Chip</b>	Osram
<b>Life rating</b>	N/A
<b>Listings</b>	C-ETL Listed to UL1598

## Mechanical

<b>Installation</b>	N/A
<b>Cord Legth</b>	N/A
<b>Dimensions</b>	19.33"L x .89"W x .73"D
<b>Weight</b>	N/A
<b>Material</b>	Aluminum
<b>Finish</b>	Powder Coated

## Driver Options

<b>Driver code</b>	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

**Photometric and Light Distribution**

[https://luxformae.com/wp-content/uploads/2025/group\\_photometric\\_light\\_distribution/24Spot-Dif.png](https://luxformae.com/wp-content/uploads/2025/group_photometric_light_distribution/24Spot-Dif.png)