



MAGS MINI 28" DIFFUSED LINEAR

MAGS Mini Series Light Fixture. The fixture engages with the track system electrically and mechanically via a magnetic connection and can be easily moved along the track. Model MAGS-ES-L70 is a DRY rated Magnetic Track, Linear Lensed Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and consumes a total of 18 watts, Diffuse Lens delivering 1150 lumens using a Osram LED Module with >90 CRI. Choose 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver needed. Fixture Dimensions are 27.7 inches L x .89 inches W x .73 inches Deep



Model Number Configuration

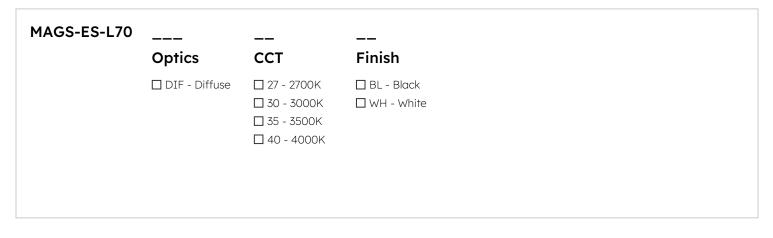

LuxFormae Corp. | New York, NY 10018, USA | www.luxformae.com | sales@luxformae.com - Copyright 2024 LuxFormae Corp. Pictures, descriptions and technical data have to be considered as purely indicative. While maintaining the basic characteristics of the product, the manufacturer reserves the right to make modifications at any time with the sole aim of improvement.



Electrical

| Voltage | 24V |
|--------------|------------------|
| Dimming | Driver dependent |
| Power | 18W |
| Lumens | 1150 |
| Power factor | N/A |

Environmental

| CRI | >90 |
|--------------|------------------------|
| Environment | Dry |
| Light Source | LED |
| Chip | Osram |
| Life rating | N/A |
| Listings | C-ETL Listed to UL1598 |

Mechanical

| Installation | N/A |
|--------------|--|
| Cord Legth | N/A |
| Dimensions | 27.7 inches L x .89 inches W x .73 inches Deep |
| Weight | N/A |
| Material | Aluminum and acrylic |
| Finish | Powder Coated |

Driver Options

Driver code PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.



Photometric and Light Distribution

https://luxformae.com/wpcontent/uploads/2025/group_photometric_light_distribution/linear 70ULS.png