


MAGS MINI Ø3.6" SPOT

MAGS Mini Series Light Fixture. Fixture engages with track system electrically and mechanically via magnetic connection and can be easily moved along the track. Model MAGS-ES-S92R is a DRY rated Magnetic Track, Adjustable Spotlight Aluminum light offered in a Black or white finish. This Light Fixture is CETL listed and contains 1 lights, total of 15 watts, delivering 485 lumens using a Cree LED Module with +90 CRI. Dimmable via 24V Volt Remote Driver (sold separately). Choice of 10, 20, or 30 degree beam spread. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Spotlight Dimensions are 3.23inches long x 3.62 inches diameter with a 90 degree tilt and 360 degree rotation.

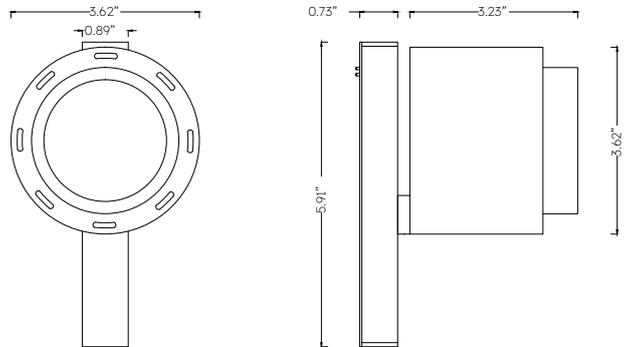

Model Number Configuration

MAGS-ES-S92R

Optics

- D10 - 10°
- D20 - 20°
- D30 - 30°

--

CCT

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

--

Finish

- BL - Black
- WH - White

Electrical

Voltage	24V
Dimming	Driver dependent
Power	15W
Lumens	485
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Cree
Life rating	N/A
Listings	C-ETL Listed to UL1598

Mechanical

Installation	N/A
Cord Legth	N/A
Dimensions	3.23"L x 3.62" Dia
Weight	N/A
Material	Aluminum
Finish	Powder Coated

Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants.
--------------------	--

Photometric and Light Distribution

D10		D20																																					
<p>10°</p>	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>9750</td> <td>Φ0.20</td> </tr> <tr> <td>2</td> <td>2437</td> <td>Φ0.40</td> </tr> <tr> <td>3</td> <td>1083</td> <td>Φ0.60</td> </tr> <tr> <td>4</td> <td>609</td> <td>Φ0.80</td> </tr> <tr> <td>5</td> <td>390</td> <td>Φ1.00</td> </tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	9750	Φ0.20	2	2437	Φ0.40	3	1083	Φ0.60	4	609	Φ0.80	5	390	Φ1.00	<p>20°</p>	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6022</td> <td>Φ0.25</td> </tr> <tr> <td>2</td> <td>1505</td> <td>Φ0.50</td> </tr> <tr> <td>3</td> <td>669</td> <td>Φ0.75</td> </tr> <tr> <td>4</td> <td>376</td> <td>Φ1.00</td> </tr> <tr> <td>5</td> <td>240</td> <td>Φ1.25</td> </tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	6022	Φ0.25	2	1505	Φ0.50	3	669	Φ0.75	4	376	Φ1.00	5	240	Φ1.25
h(m)	E(lx)	Φ(m)																																					
1	9750	Φ0.20																																					
2	2437	Φ0.40																																					
3	1083	Φ0.60																																					
4	609	Φ0.80																																					
5	390	Φ1.00																																					
h(m)	E(lx)	Φ(m)																																					
1	6022	Φ0.25																																					
2	1505	Φ0.50																																					
3	669	Φ0.75																																					
4	376	Φ1.00																																					
5	240	Φ1.25																																					
<p>D30</p> <p>30°</p>		<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2204</td> <td>Φ0.39</td> </tr> <tr> <td>2</td> <td>551</td> <td>Φ0.79</td> </tr> <tr> <td>3</td> <td>244</td> <td>Φ1.19</td> </tr> <tr> <td>4</td> <td>137</td> <td>Φ1.59</td> </tr> <tr> <td>5</td> <td>88</td> <td>Φ1.99</td> </tr> </tbody> </table>		h(m)	E(lx)	Φ(m)	1	2204	Φ0.39	2	551	Φ0.79	3	244	Φ1.19	4	137	Φ1.59	5	88	Φ1.99																		
h(m)	E(lx)	Φ(m)																																					
1	2204	Φ0.39																																					
2	551	Φ0.79																																					
3	244	Φ1.19																																					
4	137	Φ1.59																																					
5	88	Φ1.99																																					