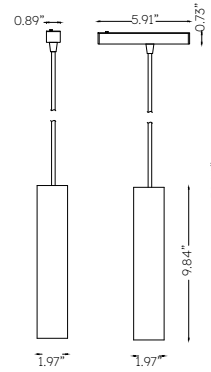


MAGS MINI Ø2" PENDANT

MAGS Mini Series Magnetic Track, Pendant Light Fixture. Choice of black or white finish. CETL listed. 1.97 inches diameter x 9.84 inches height, 58 inch maximum overall height. 1 Light, 10 watt, Cree LED delivering 685 lumens. +90 CRI. Choice of 18, 24, or 36-degree beam spreads. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver, sold separately.



Model Number Configuration

MAGS-ES-P505

Optics

- D18 - 18°
- D24 - 24°
- D36 - 36°

CCT

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

Finish

- BL - Black
- WH - White

Electrical

Voltage	24V
Dimming	Driver dependent
Power	10W
Lumens	685
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Cree
Life rating	N/A
Listings	C-ETL Listed to UL1598




Mechanical

Installation	N/A
Cord Legth	N/A
Dimensions	1.97" Dia x 9.84"H, 58" maximum overall height
Weight	N/A
Material	Aluminum
Finish	Powder Coated

Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. PS-60-ELV - 60W, 24V Power Supply. 120V Only with ELV Dimming to 10%. Fits in 4x4 Rectangular Junction Box.
--------------------	--

Photometric and Light Distribution

18D		24D																																					
<p>18°</p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>4902</td><td>Φ0.32</td></tr> <tr><td>2</td><td>1226</td><td>Φ0.65</td></tr> <tr><td>3</td><td>544</td><td>Φ0.98</td></tr> <tr><td>4</td><td>306</td><td>Φ1.31</td></tr> <tr><td>5</td><td>196</td><td>Φ1.63</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	4902	Φ0.32	2	1226	Φ0.65	3	544	Φ0.98	4	306	Φ1.31	5	196	Φ1.63	<p>30°</p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3121</td><td>Φ0.36</td></tr> <tr><td>2</td><td>780</td><td>Φ0.72</td></tr> <tr><td>3</td><td>346</td><td>Φ1.08</td></tr> <tr><td>4</td><td>195</td><td>Φ1.45</td></tr> <tr><td>5</td><td>124</td><td>Φ1.81</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	3121	Φ0.36	2	780	Φ0.72	3	346	Φ1.08	4	195	Φ1.45	5	124	Φ1.81
h(m)	E(lx)	Φ(m)																																					
1	4902	Φ0.32																																					
2	1226	Φ0.65																																					
3	544	Φ0.98																																					
4	306	Φ1.31																																					
5	196	Φ1.63																																					
h(m)	E(lx)	Φ(m)																																					
1	3121	Φ0.36																																					
2	780	Φ0.72																																					
3	346	Φ1.08																																					
4	195	Φ1.45																																					
5	124	Φ1.81																																					
<p>36D</p> <p>36°</p> 		<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2077</td><td>Φ0.64</td></tr> <tr><td>2</td><td>519</td><td>Φ1.29</td></tr> <tr><td>3</td><td>230</td><td>Φ1.94</td></tr> <tr><td>4</td><td>129</td><td>Φ2.58</td></tr> <tr><td>5</td><td>83</td><td>Φ3.23</td></tr> </tbody> </table>		h(m)	E(lx)	Φ(m)	1	2077	Φ0.64	2	519	Φ1.29	3	230	Φ1.94	4	129	Φ2.58	5	83	Φ3.23																		
h(m)	E(lx)	Φ(m)																																					
1	2077	Φ0.64																																					
2	519	Φ1.29																																					
3	230	Φ1.94																																					
4	129	Φ2.58																																					
5	83	Φ3.23																																					