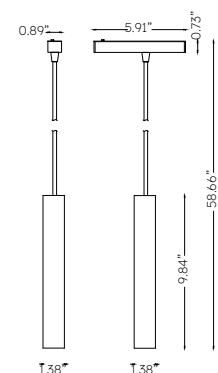


MAGS MINI Ø1.4" PENDANT

MAGS Mini Series Magnetic Track, Pendant Light Fixture. Choice of black or white finish. CETL listed. 1.38 inches diameter x 9.84 inches height, 58 inch maximum overall height. 1 Light, 5 watt, Cree LED delivering 530 lumens. +90 CRI. Choice of 20, 30, or 40-degree beam spreads. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver, sold separately.



Model Number Configuration

MAGS-ES-P35R		
Optics	CCT	Finish
<input type="checkbox"/> D20 - 20°	<input type="checkbox"/> 27 - 2700K	<input type="checkbox"/> BL - Black
<input type="checkbox"/> D30 - 30°	<input type="checkbox"/> 30 - 3000K	<input type="checkbox"/> WH - White
<input type="checkbox"/> D40 - 40°	<input type="checkbox"/> 35 - 3500K	
	<input type="checkbox"/> 40 - 4000K	

Electrical

Voltage	24V
Dimming	Driver dependent
Power	5W
Lumens	530
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Cree
Life rating	N/A
Listings	C-ETL Listed to UL1598


Mechanical

Installation	N/A
Cord Length	N/A
Dimensions	1.38" Dia x 9.84"H, 58" maximum overall height
Weight	N/A
Material	Aluminum
Finish	Powder Coated


Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. PS-60-ELV - 60W, 24V Power Supply. 120V Only with ELV Dimming to 10%. Fits in 4x4 Rectangular Junction Box.
--------------------	--


Photometric and Light Distribution

20D**20°**

h(m)	E(lx)	Φ(m)
1	3146	Φ0.34
2	786	Φ0.68
3	349	Φ1.02
4	196	Φ1.36
5	125	Φ1.71

30D**30°**

h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81

40D**40°**

h(m)	E(lx)	Φ(m)
1	1038	Φ0.70
2	259	Φ1.40
3	115	Φ2.10
4	64	Φ2.80
5	41	Φ3.51