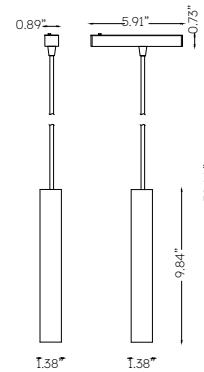


MAGS MINI Ø1.4" PENDANT

MAGS Mini Series Magnetic Track, Pendant Light Fixture. Choice of black or white finish. CETL listed. 1.38 inches diameter x 9.84 inches height, 58 inch maximum overall height. 1 Light, 5 watt, Cree LED delivering 530 lumens. +90 CRI. Choice of 20, 30, or 40-degree beam spreads. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver, sold separately.



Model Number Configuration

MAGS-ES-P35R

Optics

- D20 - 20°
- D30 - 30°
- D40 - 40°

--

CCT

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

--

Finish

- BL - Black
- WH - White

Electrical

Voltage	24V
Dimming	Driver dependent
Power	5W
Lumens	530
Power factor	N/A

Environmental

CRI	>90
Environment	Dry
Light Source	LED
Chip	Cree
Life rating	N/A
Listings	C-ETL Listed to UL1598




Mechanical

Installation	N/A
Cord Legth	N/A
Dimensions	1.38" Dia x 9.84"H, 58" maximum overall height
Weight	N/A
Material	Aluminum
Finish	Powder Coated

Driver Options

Driver code	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. PS-60-ELV - 60W, 24V Power Supply. 120V Only with ELV Dimming to 10%. Fits in 4x4 Rectangular Junction Box.
--------------------	--

Photometric and Light Distribution

20D		30D																																					
<p>20°</p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3146</td><td>Φ0.34</td></tr> <tr><td>2</td><td>786</td><td>Φ0.68</td></tr> <tr><td>3</td><td>349</td><td>Φ1.02</td></tr> <tr><td>4</td><td>196</td><td>Φ1.36</td></tr> <tr><td>5</td><td>125</td><td>Φ1.71</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	3146	Φ0.34	2	786	Φ0.68	3	349	Φ1.02	4	196	Φ1.36	5	125	Φ1.71	<p>30°</p> 	<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3121</td><td>Φ0.36</td></tr> <tr><td>2</td><td>780</td><td>Φ0.72</td></tr> <tr><td>3</td><td>346</td><td>Φ1.08</td></tr> <tr><td>4</td><td>195</td><td>Φ1.45</td></tr> <tr><td>5</td><td>124</td><td>Φ1.81</td></tr> </tbody> </table>	h(m)	E(lx)	Φ(m)	1	3121	Φ0.36	2	780	Φ0.72	3	346	Φ1.08	4	195	Φ1.45	5	124	Φ1.81
h(m)	E(lx)	Φ(m)																																					
1	3146	Φ0.34																																					
2	786	Φ0.68																																					
3	349	Φ1.02																																					
4	196	Φ1.36																																					
5	125	Φ1.71																																					
h(m)	E(lx)	Φ(m)																																					
1	3121	Φ0.36																																					
2	780	Φ0.72																																					
3	346	Φ1.08																																					
4	195	Φ1.45																																					
5	124	Φ1.81																																					
<p>40D</p> 		<table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>Φ(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1038</td><td>Φ0.70</td></tr> <tr><td>2</td><td>259</td><td>Φ1.40</td></tr> <tr><td>3</td><td>115</td><td>Φ2.10</td></tr> <tr><td>4</td><td>64</td><td>Φ2.80</td></tr> <tr><td>5</td><td>41</td><td>Φ3.51</td></tr> </tbody> </table>		h(m)	E(lx)	Φ(m)	1	1038	Φ0.70	2	259	Φ1.40	3	115	Φ2.10	4	64	Φ2.80	5	41	Φ3.51																		
h(m)	E(lx)	Φ(m)																																					
1	1038	Φ0.70																																					
2	259	Φ1.40																																					
3	115	Φ2.10																																					
4	64	Φ2.80																																					
5	41	Φ3.51																																					