

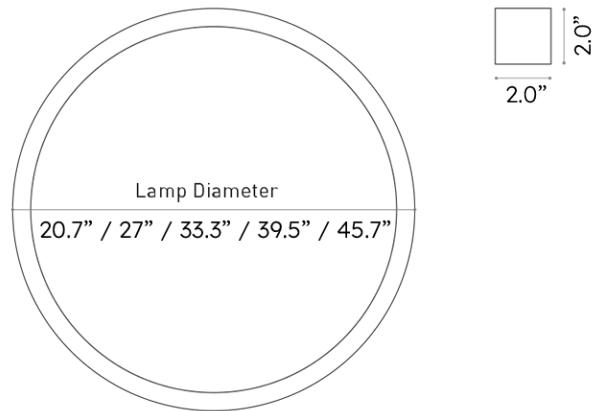
SHAPES 2.0 X 2.0 CIRCLE

Shapes 2.0x2.0 Circle is a refined circular luminaire that embodies timeless simplicity, material versatility, and modern performance. Designers can tailor each fixture through choices of mounting type, size, distribution type, color temperature, profile finish, acoustic treatments, and 3D-printed textured material options—all of which can be combined to achieve the exact aesthetic and functional balance required. The result is a soft, diffused glow with high visual comfort and a profile that can be visually quiet or richly expressive.

Key Features:

- Choice of surface or suspension mount.
- Offered in several diameters
- 90+ CRI diffused optics
- 0-10V standard dimming (other protocols available upon request)
- CCT options: 2400K-4000K, RGB, RGBW, Tunable White
- Electrical: 100-277V universal input
- Accessories: Emergency battery backup
- Material options include: profile finishes, 3mm acoustic wrap, 9mm acoustic center panel, and 3D-printed textured surfaces
- Wide array of profile finishes including powder coat, sandblast painting, anodized brushing, plating, and custom RAL
- Choice of light distribution patterns: inner, outer, direct, indirect, direct/indirect
- Flicker-free illumination
- 5-year warranty

Shapes 2.0x2.0 Circle blends form, texture, and light into a highly customizable fixture designed to complement both modern and classic interiors. With its performance optics, material flexibility, and expansive finish palette, Shapes empowers designers to create lighting with intention—quiet, bold, soft, tactile, or anything in between.



Model Number Configuration**LUXFORMAE**
SHP-2.0x2.0-CIRC

PROJECT NAME:

Fixture Type:

Product sheet printed on: **2026-02-21 16:34:44**

Acrylic Length	Optics	CCT	Finish
<input type="checkbox"/> 2070 - 20.7 in	<input type="checkbox"/> DF- Diffused	<input type="checkbox"/> 24 - 2400K	<input type="checkbox"/> See Data Sheet
<input type="checkbox"/> 2700 - 27 in		<input type="checkbox"/> 27 - 2700K	
<input type="checkbox"/> 3330 - 33.3 in		<input type="checkbox"/> 30 - 3000K	
<input type="checkbox"/> 3950 - 39.5 in		<input type="checkbox"/> 35 - 3500K	
<input type="checkbox"/> 4570 - 45.7 in		<input type="checkbox"/> 40-4000K	
<input type="checkbox"/> 6000 - 60 in		<input type="checkbox"/> RGB - RGB	
<input type="checkbox"/> 7200 - 72 in		<input type="checkbox"/> RGBW - RGBW	
		<input type="checkbox"/> TUN - Tunable White	

Electrical

Voltage	120-277V
Dimming	0-10V
Power	20.7in - 45W 27.0in - 60W 33.3in - 75W 39.5in - 90W 45.7in - 105W 60in - 135W 72in - 165W
Lumens	20.7in - 3600 Lumens 27.0in - 4800 Lumens 33.3in - 6000 Lumens 39.5in - 7200 Lumens 45.7in - 8400 Lumens 60in - 11000 Lumens 72in - 13200 Lumens
Power factor	N/A

Environmental

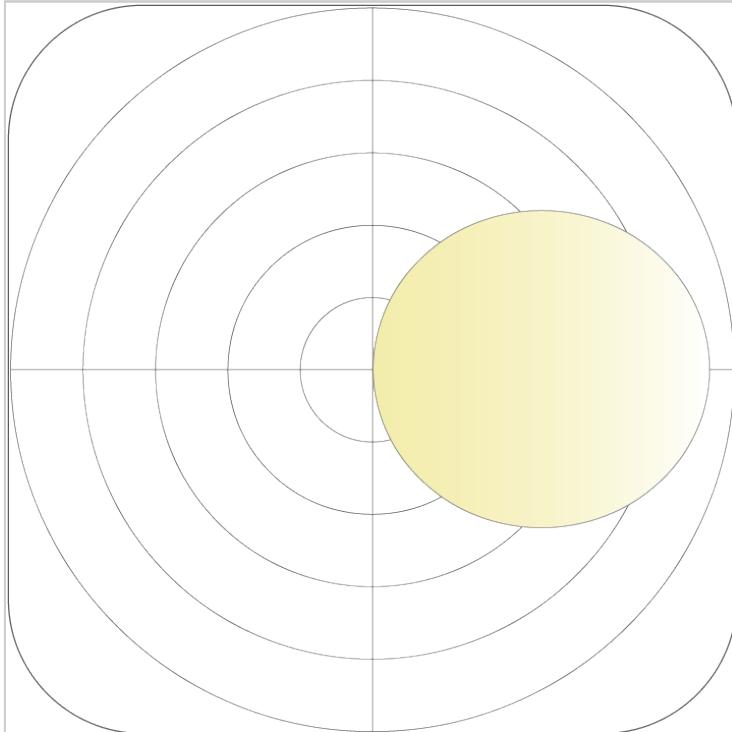
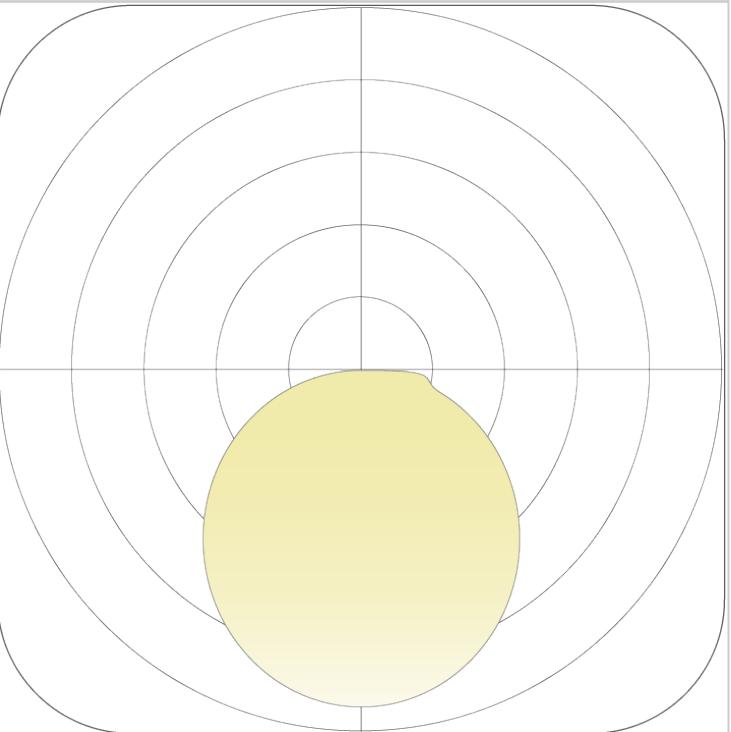
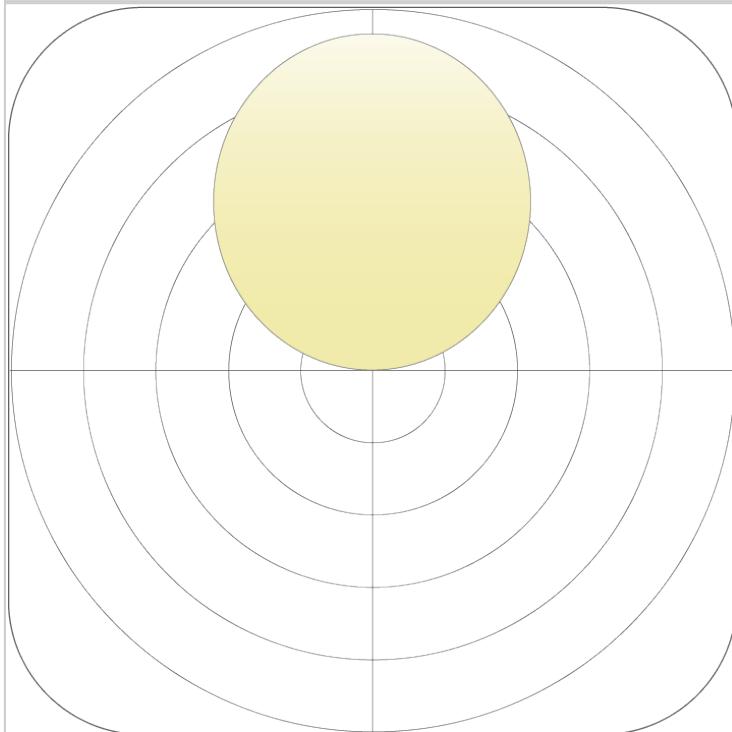
CRI	90+
Environment	Dry
Light Source	LED
Chip	N/A
Life rating	N/A
Listings	C-ETL Listed to UL1598

Mechanical

Installation	N/A
Cord Length	10Ft for pendants
Dimensions	2"x2" profile; 20.7" / 27" / 33.3" / 39.5" / 45.7" / 60" / 72" Diameters
Weight	N/A
Material	Aluminum, Polycarbonate
Finish	See following pages to select finishes

Driver Options

Driver code	N/A
--------------------	-----

Photometric and Light Distribution**Inner****Direct****Indirect****Indirect-Direct**