


SHAPES 2.0 X 2.0 LINEAR PENDANT

Shapes 2.0x2.0 Linear Pendant is a refined linear luminaire that embodies timeless simplicity and modern versatility. Choose size, color temperature, and profile finish to create a soft, diffused glow with high visual comfort. Key Features:

- Offered in several lengths
- 90+ CRI diffused optics
- 0-10V standard dimming (other protocols available upon request)
- CCT options: 2400K-4000K, RGB, RGBW, Tunable White
- Wide array of profile finish options including powder coat, sandblast, anodized brushing, plating
- Compatible with Shapes Linear and Circular Connectors for creating shapes and configurations
- Flicker-free illumination
- 5 year warranty

Shapes 2.0x2.0 Linear Pendant blends form, texture, and light into a highly functional yet visually compelling fixture that enhances both modern and classic interiors.

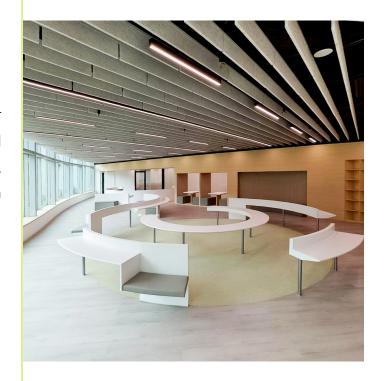

Model Number Configuration

1970 - 19.7 in	SHP-2.0x2.0-LIN Acrytic Length	 Optics	PROJECT NAME: FIXTURE TYPE: CCT Product sheet pri	—— nte G in 150 25-11-30 15:45:08
□ 2750 - 27.5 in □ 30 - 3000K □ 3140 - 31.4 in □ 35 - 3500K □ 3540 - 35.4 in □ 40-4000K □ 3930 - 39.3 in □ RGB - RGB □ 4320 - 43.2 in □ RGBW - RGBW □ 4720 - 47.2 in □ TUN - Tunable White □ 5110 - 51.1 in □ 5500 - 55 in □ 5900 - 59 in □ 6290 - 62.9 in □ 6680 - 66.8 in □ 7070 - 70.7 in □ 7470 - 74.7 in □ 7860 - 78.6 in □ 8250 - 82.5 in □ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 1970 - 19.7 in	☐ DF- Diffused	□ 24 - 2400K	☐ See Data Sheet
3140 - 31.4 in	☐ 2360 - 23.6 in		☐ 27 - 2700K	
3540 - 35.4 in	□ 2750 - 27.5 in		□ 30 - 3000K	
3930 - 39.3 in	☐ 3140 - 31.4 in		□ 35 - 3500K	
□ 4320 - 43.2 in □ RGBW - RGBW □ 4720 - 47.2 in □ TUN - Tunable White □ 5110 - 51.1 in □ 5500 - 55 in □ 5900 - 59 in □ 6290 - 62.9 in □ 6680 - 66.8 in □ 7070 - 70.7 in □ 7470 - 74.7 in □ 7860 - 78.6 in □ 8250 - 82.5 in □ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 3540 - 35.4 in		☐ 40-4000K	
□ 4720 - 47.2 in □ TUN - Tunable White □ 5110 - 51.1 in □ 5500 - 55 in □ 5900 - 59 in □ 6290 - 62.9 in □ 6680 - 66.8 in □ 7070 - 70.7 in □ 7470 - 74.7 in □ 7860 - 78.6 in □ 8250 - 82.5 in □ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 3930 - 39.3 in		RGB - RGB	
□ 5110 - 51.1 in □ 5500 - 55 in □ 5900 - 59 in □ 6290 - 62.9 in □ 6680 - 66.8 in □ 7070 - 70.7 in □ 7470 - 74.7 in □ 7860 - 78.6 in □ 8250 - 82.5 in □ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 4320 - 43.2 in		RGBW - RGBW	
5500 - 55 in 5900 - 59 in 6290 - 62.9 in 6680 - 66.8 in 7070 - 70.7 in 7470 - 74.7 in 7860 - 78.6 in 8250 - 82.5 in 8650 - 86.5 in	☐ 4720 - 47.2 in		\square TUN - Tunable White	
☐ 5900 - 59 in ☐ 6290 - 62.9 in ☐ 6680 - 66.8 in ☐ 7070 - 70.7 in ☐ 7470 - 74.7 in ☐ 7860 - 78.6 in ☐ 8250 - 82.5 in ☐ 8650 - 86.5 in ☐ 9040 - 90.4 in	☐ 5110 - 51.1 in			
6290 - 62.9 in 6680 - 66.8 in 7070 - 70.7 in 7470 - 74.7 in 7860 - 78.6 in 8250 - 82.5 in 8650 - 86.5 in 9040 - 90.4 in	☐ 5500 - 55 in			
☐ 6680 - 66.8 in ☐ 7070 - 70.7 in ☐ 7470 - 74.7 in ☐ 7860 - 78.6 in ☐ 8250 - 82.5 in ☐ 8650 - 86.5 in ☐ 9040 - 90.4 in	☐ 5900 - 59 in			
7070 - 70.7 in 7470 - 74.7 in 7860 - 78.6 in 8250 - 82.5 in 8650 - 86.5 in 9040 - 90.4 in	☐ 6290 - 62.9 in			
☐ 7470 - 74.7 in ☐ 7860 - 78.6 in ☐ 8250 - 82.5 in ☐ 8650 - 86.5 in ☐ 9040 - 90.4 in	☐ 6680 - 66.8 in			
☐ 7860 - 78.6 in ☐ 8250 - 82.5 in ☐ 8650 - 86.5 in ☐ 9040 - 90.4 in	☐ 7070 - 70.7 in			
□ 8250 - 82.5 in □ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 7470 - 74.7 in			
□ 8650 - 86.5 in □ 9040 - 90.4 in	☐ 7860 - 78.6 in			
□ 9040 - 90.4 in	☐ 8250 - 82.5 in			
	☐ 8650 - 86.5 in			
□ 9430 - 943 in	☐ 9040 - 90.4 in			
1 / 100 / 110 111	☐ 9430 - 94.3 in			



PROJECT NAME:

FIXTURE TYPE:

Product sheet printed on: 2025-11-30 15:45:08

MANFORMAE

Electrical

Voltage 120-277V

Dimming 0-10V

Power N/A

Lumens N/A

Power factor N/A

Environmental

CRI 90+
Environment Dry
Light Source LED
Chip N/A
Life rating N/A

Listings C-ETL Listed to UL1598

Mechanical

Dimensions 2"x2" profile

Weight N/A

MaterialAluminum, Fabric, PolycarbonateFinishSee following pages to select finishes

Driver Options

Driver code N/A