



SHAPES 2.0 X 2.0 CIRCLE PENDANT

Shapes 2.0x2.0 Circle Pendant is a refined circular luminaire that embodies timeless simplicity and modern versatility. Choose size, light distribution type, color temperature, and profile finish to create a soft, diffused glow with high visual comfort.

Key Features:

- Offered in several diameters
- 90+ CRI diffused optics
- 0-10V standard dimming (other protocols available upon request)
- CCT options: 2400K-6500K, RGB, RGBW
- Wide array of profile finish options including powder coat, sand-blast, anodized brushing, plating
- Choice of light distribution patterns - inner, direct, indirect, direct/indirect
- Flicker-free illumination
- 5 year warranty

Shapes 2.0x2.0 Circle Pendant blends form, texture, and light into a highly functional yet visually compelling fixture that enhances both modern and classic interiors.

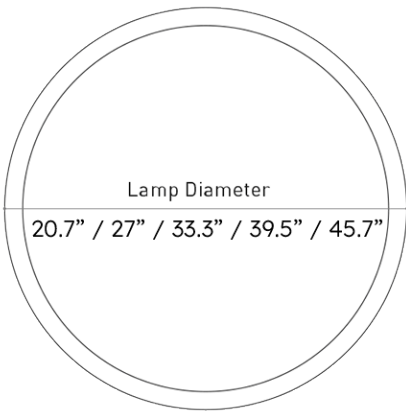

Model Number Configuration

SHP-2.0x2.0-CIRC	----	--	--	--	----
Size	Optics	Distribution	CCT	Finish	
☐ 2070 - 20.7 in	☐ DF- Diffused	☐ IL - Inner	☐ 24 - 2400K	☐ See Finish Options Page to select Profile Finish	
☐ 2700 - 27 in		☐ DL - Direct	☐ 27 - 2700K		
☐ 3330 - 33.3 in		☐ UL - Indirect	☐ 30 - 3000K		
☐ 3950 - 39.5 in		☐ UDL - Indirect/Direct	☐ 35 - 3500K		
☐ 4570 - 45.7 in			☐ 40-4000K		
			☐ 55 - 5500K		
			☐ 65- 6500K		
			☐ RGB - RGB		
			☐ RGBW - RGBW		
			☐ TUN - Tunable White		

Electrical

- Voltage 120-277V
- Dimming 0-10V driver included.

Other dimming protocols available, contact us to learn more.

Power&Lumens

Size	Wattage	Lumens
20.7in	45W	1800
27.0in	60W	2400
33.3in	75W	3000
39.5in	90W	3600
45.7in	105W	4200

*Lumens measured at 4000K CCT


- CCT 2400K, 2700K, 3000K, 3500K, 4000K
5500K, 6500K, RGB, RGBW, Tunable White

Environmental

- CRI 90+
- Environment Dry
- Light Source LED
- Chip N/A
- Life rating N/A
- Listings C-ETL Listed to UL1598

Mechanical

- Installation N/A
- Cord Legth 10Ft for pendants
- Dimensions 2"x2" profile; 20.7" / 27" / 33.3" / 39.5" / 45.7" Diameters
- Weight N/A
- Material Aluminum, Fabric, Polycarbonate
- Finish See following pages for finishes information
- Optics Polycarbonate diffusion panel
- Distribution Inner (inside light), Direct (down light), Indirect (up light), Indirect/Direct (up/down light)

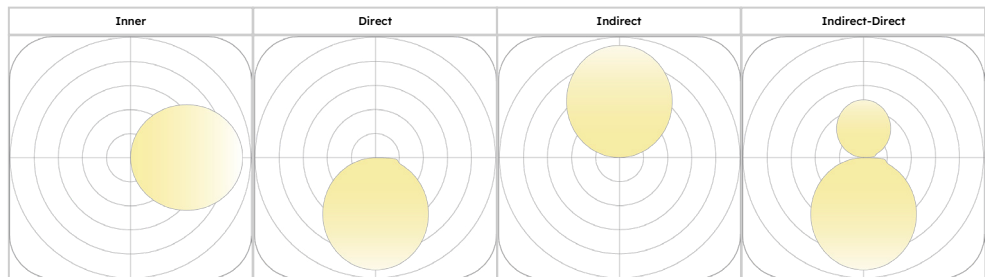

Finishes

Profile Finishes Shapes offers a diverse range of colors and finishes achieved through advanced manufacturing processes, including:

- **Powder Coating** – Provides a durable, uniform finish with excellent color retention.
- **Sandblast Painting** – Delivers a textured, matte surface with a rugged character.
- **Anodized Brushing** – Creates a refined, sleek appearance while enhancing corrosion resistance.
- **Plating** – Adds a decorative metallic layer that is both protective and visually distinctive.
- **Custom RAL**- Custom RAL colors are available upon request. Contact us to learn more.

These finishing techniques allow Shapes to meet a wide range of aesthetic and performance requirements, ensuring each product is tailored to both design vision and functional needs.

Please select your profile finish from Profile Colors and include finish code in code configuration.

The selected finish will apply to both the fixture body and canopy.

PROFILE COLORS

	AL-AN- Anodized Brush Aluminum
	BK-AN- Anodized Brush Black
	BK-PC- Powder Coated Black
	BL-PC- Powder Coated Blue
	GO-PL- Plated Gold
	GR-AN - Sand Blast Grey
	RD-PC- Powder Coated Red
	SL-PC - Powder Coated Silver
	WH-PC- Powder Coated White



RAL- Custom RAL colors available upon request