


SHAPES 2.0 X 2.0 LINEAR PENDANT

Shapes 2.0x2.0 Linear Pendant is a refined linear luminaire that embodies timeless simplicity and modern versatility. Choose size, color temperature, and profile finish to create a soft, diffused glow with high visual comfort.

Key Features:


- · Offered in several lengths
- 90+ CRI diffused optics
- 0–10V standard dimming (other protocols available upon request)
- CCT options: 2400K-6500K, RGB, RGBW
- Wide array of profile finish options including powder coat, sand-blast, anodized brushing, plating
- Compatible with Shapes Linear and Circular Connectors for creating shapes and configurations
- Flicker-free illumination
- 5 year warranty

Shapes 2.0x2.0 Linear Pendant blends form, texture, and light into a highly functional yet visually compelling fixture that enhances both modern and classic interiors.

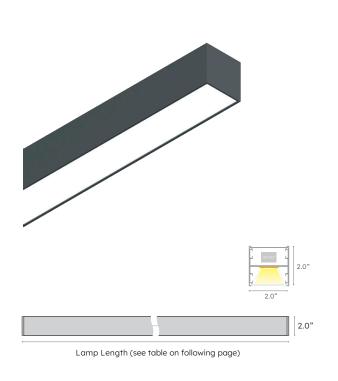

Model Number Configuration

IP-2.0x2.0-LIN				
Size ☐ 1970 - 19.7 ☐ 2360 - 23.6 ☐ 2750 - 27.5 ☐ 3140 - 31.4 ☐ 3540 - 35.4 ☐ 3930 - 39.3 ☐ 4320 - 43.2	in in in I in in	Distribution ☐ DL - Direct	CCT ☐ 24 - 2400K ☐ 27 - 2700K ☐ 30 - 3000K ☐ 35 - 3500K ☐ 40 - 4000K	Finish ☐ See Finish Options Page to select Profile Finish
4720 - 47.2 5110 - 51.1 i 5500 - 55 i 5900 - 59 i 6290 - 62.9 6680 - 66.8 7070 - 70.7 7470 - 74.7 7860 - 78.6 8250 - 82.5 8650 - 86.5	n n n in 3 in in in in in		□ 55 - 5500K □ 65 - 6500K □ RGB - RGB □ RGBW - RGBW □ TUN - Tunable W	/hite





Electrical

Voltage 120-277V

Dimming 0-10V driver included

Other dimming protocols available, contact us to learn more.

Power&Lumens

Size	Wattage	Lumens
19.7"	7.5W	750
23.6"	9W	900
27.5"	10.5W	1050
31.4"	12W	1200
35.4"	13.5W	1350
39.3"	15W	1500
43.2"	16.5W	1650
47.2"	18W	1800
51.1"	19.5W	1950
55"	21W	2100
59"	22.5W	2250
62.9"	24W	2400
66.8"	25.5W	2550
70.7"	27W	2700
74.7"	28.5W	2850
78.6"	30W	3000
82.5"	31.5W	3150
86.5"	33W	3300
90.4"	34.5W	3450
94.3"	36W	3600

^{*}Lumens measured at 4000K CCT

CCT 2400K, 2700K, 3000K, 3500K, 4000K 5500K, 6500K, RGB, RGBW, Tunable White

Environmental

CRI 90+
Environment Dry
Light Source LED
Chip N/A
Life rating N/A

Listings C-ETL Listed to UL1598

Mechanical

Installation N/A

Cord Legth 10Ft for pendants

Dimensions 2"x2" profile; 19.7" / 23.5"/27.5"/31.4"/

35.4"/39.3"/43.2"/47.2"/51.1"/55"/59"/

62.9"/66.8"/70.7"/74.7"/78.6"/82.5"/

86.5"/90.4"/94.3"

Weight N/A
Material Alum

Finish

Optics


Distribution

Aluminum, Fabric, Polycarbonate

See following pages for finishes details

Polycarbonate diffusion panel

Direct or Indirect (down or up light)





Finishes

Profile Finishes

Shapes offers a diverse range of colors and finishes achieved through advanced manufacturing processes, including:

- Powder Coating Provides a durable, uniform finish with excellent color retention.
- Sandblast Painting Delivers a textured, matte surface with a rugged character.
- Anodized Brushing Creates a refined, sleek appearance while enhancing corrosion resistance.
- Plating Adds a decorative metallic layer that is both protective and visually distinctive.
- Custom RAL Custom RAL colors are available upon request. Contact us to learn more.

These finishing techniques allow Shapes to meet a wide range of aesthetic and performance requirements, ensuring each product is tailored to both design vision and functional needs.

Please select your profile finish from Profile Colors and include finish code in code configuration.

The selected finish will apply to both the fixture body and canopy.

PROFILE COLORS

