


LIGHTBOX

Light Box is a limitless opportunity to design with light. Using aluminum frames with fabric diffusing medium, Light Box allows the bespoke creation of illuminated geometric shapes in small—to large-scale sizes.

Light Box can be surface mounted, recessed, or suspended as elements of architectural embellishment and for ambient illumination.

Choose mounting type, LED Type(choice of 2700K, 3000K, 3500K, 4000K, Tunable White 2700K-4000K, 3000K RGBW, or 4000K RGBW), and Dimming (0-10V, DMX), and specify overall dimensions. Aluminum frames are offered in aluminum, painted white, or black finishes.

Seamless fabrics are offered up to 5' wide and 50' long, Seamed fabrics can be larger. The standard fabric is white for optimal diffusion, and custom printing options are available. Insect screens are available.

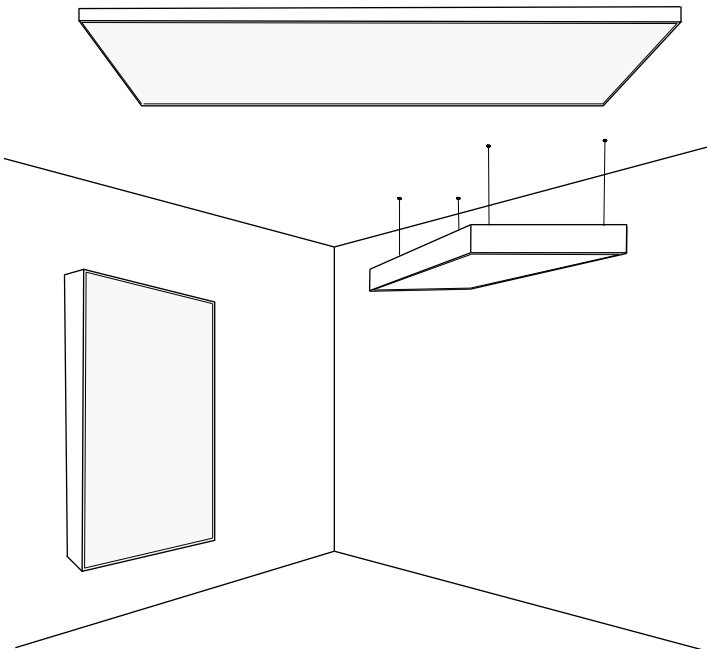

Model Number Configuration

LBX ____	____	____	____	____	____	____	____
Mounting	CCT	Dimming	Depth	Fabric Width	Fabric Length	Bug Screen	Finish
<input type="checkbox"/> Ceiling - Rods	<input type="checkbox"/> 27 - 2700K	<input type="checkbox"/> 0-10V	<input type="checkbox"/> 1.6 - 1.6"	<input type="checkbox"/> Max 5'	<input type="checkbox"/> Max 50'	<input type="checkbox"/> Max 50'	<input type="checkbox"/> AL - Aluminum
<input type="checkbox"/> Ceiling - Cable	<input type="checkbox"/> 30 - 3000K	<input type="checkbox"/> DMX	<input type="checkbox"/> 3 - 3"				<input type="checkbox"/> BL- Black
<input type="checkbox"/> Ceiling - Surface	<input type="checkbox"/> 35 - 3500K		<input type="checkbox"/> 5 - 5"				<input type="checkbox"/> WH - White
<input type="checkbox"/> Recessed - Rods	<input type="checkbox"/> 40 - 4000K		<input type="checkbox"/> 6 - 6"				
<input type="checkbox"/> Recessed - Cable	<input type="checkbox"/> 2740 - 2700K - 4000K Tunable						
<input type="checkbox"/> Wall - Surface	<input type="checkbox"/> RGBW30 - RGB with 3000K						
<input type="checkbox"/> Wall - Recessed	<input type="checkbox"/> RGBW40- RGB with 4000K						
<input type="checkbox"/> Pendant - Rods							
<input type="checkbox"/> Pendant - Cable							

Mounting

LightBox offers mounting options for all situations:

Ceiling	Surface	Rods (Unistrut) Aircraft Cable Screws
	Recessed	Rods (Unistrut) Aircraft Cable
Wall	Surface	Brackets Screws
	Recessed	Brackets Screws
Pendant	Suspended	Rods(Unistrut) Aircraft Cable

LED Type

Integral LED options include choice of static color temperatures, tunable white, and RGBW options.
Wattage and Lumen outputs are per square foot.

Led Type	CCT	Output/Wattage	Lumen Output
Static	2700K	19 W	674
	3000K		
	3500K		
	4000K		
Tunable White	2700-4000K		
RGBW	3000K White	7 W	76
	4000K White		

Input Voltage

All LightBox use 120V-277V inut Voltage

Dimming Type

LightBox is compatible with the following dimming systems

0-10V
DMX

Dimensions

Lightbox dimensions are custom specified.
To begin, select from 4 possible depth/heights:

1.6- 1.6"
3- 3"
5- 5"
6- 6"

Then specify width and overall length.

Seamless fabric diffusers can up to 5' wide and 50' long.
Larger sizes are available with seams.

Fabric Diffuser

Lightbox's smooth white fabric diffusers provides even diffusion and distribution of white and RGB LED illumination.

Seamless panels are available in sizes up to 5' wide x 50' long.

Custom printed panels are available, with client provided artwork.


Fabric Optional

Optional insect screens are offered, these help insure fixtures stay clean and stay in optimal operating shape.

Frame Color

Aluminum frame description and colors offered

WH- White
BL- Black
AL- Aluminum

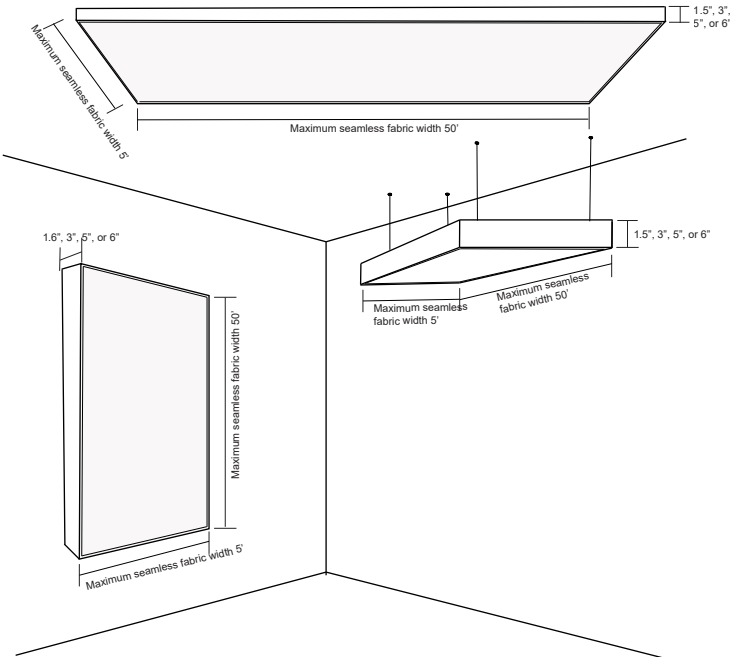



PROJECT NAME:
FIXTURE TYPE:
Product sheet printed on:

Notes