



SHAPES FORM 360

Surface, Suspension, Recessed

Form 360 is a versatile family of low-profile circular luminaires available as surface, suspension or recessed mount. With multiple diameters, depths, finishes, and control options, the collection delivers uniform, flicker-free illumination ideal for commercial, hospitality, and architectural environments. Its flexible specification options make it easy to integrate Form 360 into a wide range of ceiling conditions and design intents.

Key Features

- Size Range: Standard diameters from 13"– 47.2"
- Flexible Ordering: No minimum order quantity — single fixtures available
- High Performance: 100 lm/W, 90+ CRI
- Mounting Options: Suspension or surface
- Driver Options: Built-in driver or remote ceiling box
- Light Quality: Uniform, flicker-free illumination
- Durability: 5-year warranty
- Finishes: White, Black, Silver, Gold, or Custom RAL
- Electrical: 100–277V universal input
- Control Options: 0–10V, Tunable White
- Accessories: Emergency battery backup
- Ease of Installation: Streamlined, contractor-friendly setup

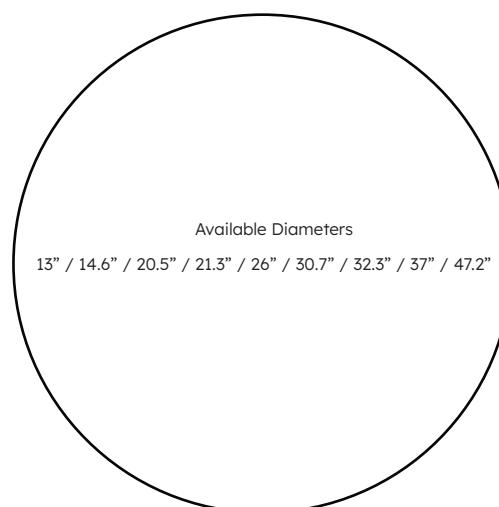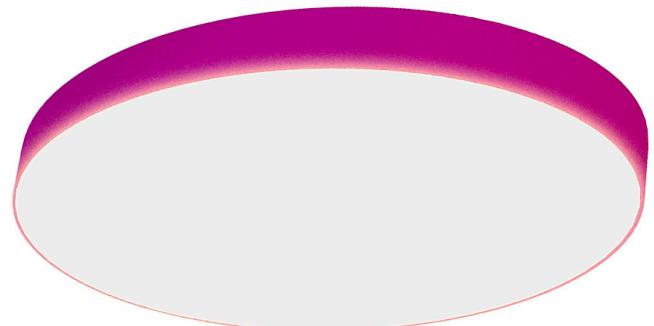

Model Number Configuration

SHP-FORM 360

| Mounting | Height | Size | Dimming | Accessories | CCT | Finish |
|---------------------------------------|--------------------------------------|---|------------------------------------|--|-------------------------------------|---------------------------------|
| <input type="checkbox"/> PT- Pendant | <input type="checkbox"/> S - 2.36 in | <input type="checkbox"/> 1300 - 13 in | <input type="checkbox"/> 02- 0-10V | <input type="checkbox"/> EM- Emergency | <input type="checkbox"/> 27 - 2700K | <input type="checkbox"/> Black |
| <input type="checkbox"/> SF- Surface | <input type="checkbox"/> M - 3.15 in | <input type="checkbox"/> 1460 - 14.6 in | | | <input type="checkbox"/> 30 - 3000K | <input type="checkbox"/> White |
| <input type="checkbox"/> RC- Recessed | <input type="checkbox"/> T- 3.93 in | <input type="checkbox"/> 2050 - 20.5 in | | | <input type="checkbox"/> 35 - 3500K | <input type="checkbox"/> Silver |

Electrical


| | | Driver Options |
|---------------------------|--|---------------------------|
| Voltage | 120-277V | |
| Dimming | 0-10V, Tunable white | |
| Power & Lumens | 13 in - 15W, 1500 Lumens 14.6 in - 20W, 2000 Lumens 20.5 in - 35W, 3500 Lumens 21.3 in - 40W, 4000 Lumens 26 in - 60W, 6000 Lumens 30.7 in - 80W, 8000 Lumens 32.3 in - 90W, 9000 Lumens 37 in - 120W, 12000 Lumens 47.2 in - 200W, 20000 Lumens | Driver code N/A |
| Accessories | Emergency battery backup | |
| Power factor | N/A | |

Environmental

| | |
|---------------------|------------------------|
| CRI | 90+ |
| Environment | Dry |
| Light Source | LED |
| Chip | N/A |
| Life rating | N/A |
| Listings | C-ETL Listed to UL1598 |

Mechanical

| | |
|---------------------|---|
| Installation | N/A |
| Cord Length | 10Ft for pendants |
| Dimensions | 2.36" / 3.15" / 3.93" Height/Depth 13" / 14.6" / 20.5" / 21.3" / 26" / 30.7" / 32.3" / 37" / 47.2" Diameters |
| Weight | N/A |
| Material | Aluminum, Polycarbonate |
| Finish | Black, White, Silver or Gold |
| Optics | Polycarbonate diffusion panel |
| Distribution | Direct (down light) |



Notes
