

# SHAPES 2.0 X 2.0 LINEAR



## Surface Suspension

Shapes 2.0x2.0 Linear is a refined linear luminaire that embodies timeless simplicity and modern versatility. Designers can tailor each fixture through choices of mounting type, size, color temperature, profile finish, acoustic treatments, and 3D-printed textured material options—all of which can be combined to achieve the exact aesthetic and functional balance required. The result is a soft, diffused glow with high visual comfort and a profile that can be visually quiet or richly expressive.

### Key Features:

- Choice of surface or suspension mount.
- Offered in several lengths
- 90+ CRI diffused optics
- 0-10V standard dimming (other protocols available upon request)
- CCT options: 2400K-4000K, RGB, RGBW, Tunable White
- Electrical: 100-277V universal input
- Accessories: Emergency battery backup
- Material options include: profile finishes, 3mm acoustic wrap and 3D-printed textured surfaces
- Wide array of profile finishes including powder coat, sandblast painting, anodized brushing, plating, and custom RAL
- Compatible with Shapes Linear and Circular Connectors for creating shapes and configurations
- Flicker-free illumination
- 5 year warranty

Shapes 2.0x2.0 Linear blends form, texture, and light into a highly functional yet visually compelling fixture that enhances both modern and classic interiors.

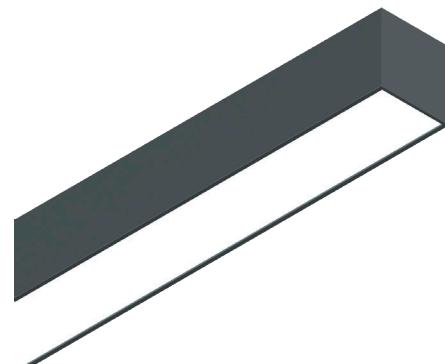

Lamp Length (see table on following page)

### Model Number Configuration

#### SHP-2.0x2.0-LIN

Mounting	Size	Optics	Distribution	Accessories	CCT	Profile Finish
<input type="checkbox"/> PT-Pendant	<input type="checkbox"/> 1970 - 19.7 in	<input type="checkbox"/> DF- Diffused	<input type="checkbox"/> DL - Direct	<input type="checkbox"/> EM- Emergency	<input type="checkbox"/> 24 - 2400K	<input type="checkbox"/> See Profile Colors Page
<input type="checkbox"/> SF - Surface	<input type="checkbox"/> 2360 - 23.6 in				<input type="checkbox"/> 27 - 2700K	<input type="checkbox"/> See Acoustic Colors Page
	<input type="checkbox"/> 2750 - 27.5 in				<input type="checkbox"/> 30 - 3000K	<input type="checkbox"/> See Texture Colors Page
	<input type="checkbox"/> 3140 - 31.4 in				<input type="checkbox"/> 35 - 3500K	
	<input type="checkbox"/> 3540 - 35.4 in				<input type="checkbox"/> 40 - 4000K	
	<input type="checkbox"/> 3930 - 39.3 in				<input type="checkbox"/> RGB - RGB	
	<input type="checkbox"/> 4320 - 43.2 in				<input type="checkbox"/> RGBW - RGBW	
	<input type="checkbox"/> 4720 - 47.2 in				<input type="checkbox"/> TUN - Tunable White	
	<input type="checkbox"/> 5110 - 51.1 in					
	<input type="checkbox"/> 5500 - 55 in					
	<input type="checkbox"/> 5900 - 59 in					
	<input type="checkbox"/> 6290 - 62.9 in					
	<input type="checkbox"/> 6680 - 66.8 in					
	<input type="checkbox"/> 7070 - 70.7 in					
	<input type="checkbox"/> 7470 - 74.7 in					
	<input type="checkbox"/> 7860 - 78.6 in					
	<input type="checkbox"/> 8250 - 82.5 in					
	<input type="checkbox"/> 8650 - 86.5 in					
	<input type="checkbox"/> 9040 - 90.4 in					
	<input type="checkbox"/> 9430 - 94.3 in					

## Electrical

**Voltage** 120-277V

**Dimming** 0-10V driver included

Other dimming protocols available, contact us to learn more.

## Power&Lumens

Size	Wattage	Lumens
19.7"	7.5W	750
23.6"	9W	900
27.5"	10.5W	1050
31.4"	12W	1200
35.4"	13.5W	1350
39.3"	15W	1500
43.2"	16.5W	1650
47.2"	18W	1800
51.1"	19.5W	1950
55"	21W	2100
59"	22.5W	2250
62.9"	24W	2400
66.8"	25.5W	2550
70.7"	27W	2700
74.7"	28.5W	2850
78.6"	30W	3000
82.5"	31.5W	3150
86.5"	33W	3300
90.4"	34.5W	3450
94.3"	36W	3600

\*Lumens measured at 4000K CCT

## CCT

2400K, 2700K, 3000K, 3500K, 4000K  
RGB, RGBW, Tunable White

## Accessories

Emergency battery backup

## Environmental

**CRI** 90+

**Environment** Dry

**Light Source** LED

**Chip** N/A

**Life rating** N/A

**Listings** C-ETL Listed to UL1598

## Mechanical

**Installation** N/A

**Cord Length** 10FT for suspensions

**Dimensions** 2"x2" profile; 19.7" / 23.5" / 27.5" / 31.4" / 35.4" / 39.3" / 43.2" / 47.2" / 51.1" / 55" / 59" / 62.9" / 66.8" / 70.7" / 74.7" / 78.6" / 82.5" / 86.5" / 90.4" / 94.3"


**Weight** N/A

**Material** Aluminum, Polycarbonate

**Finish** See following pages for finishes details

**Optics** Polycarbonate diffusion panel

**Distribution** Direct or Indirect (down or up light)

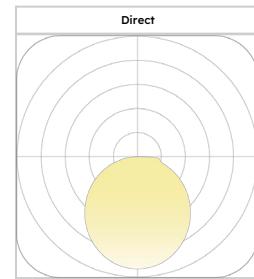

## Finishes

Luxformae's Shapes collection offers designers a high level of material flexibility—with acoustic treatments, 3D-printed textures, and premium profile finishes. Profiles may be finished in any of our colors or material textures or wrapped in acoustic material, creating the precise balance of performance and visual expression required. With an extensive palette ranging from sophisticated neutrals to bold, playful tones, Shapes enables refined architectural statements as well as more whimsical, color-driven compositions. Whether the goal is visual warmth, sound control, or a distinctive material identity, designers can tailor each fixture to perfectly support their project vision.

### Profile Colors

Shapes provides a wide range of profile finishes to help designers achieve the exact visual expression their project requires. Options include powder coating, sandblast painting, anodized brushing, plating, and custom RAL colors upon request. These techniques offer everything from sleek, refined surfaces to more expressive or character-driven aesthetics, ensuring each fixture aligns with the intended design vision.


### Acoustic Colors

Shapes fixtures can be enhanced with integrated acoustic elements that elevate both visual and environmental comfort. Profiles may be wrapped in a 3mm acoustic material. Available in an expansive palette of 48 colors, these acoustic treatments allow designers to introduce subtle tonal harmony or bold contrast within a space. Whether used alone or combined with textured surfaces or premium finishes, the acoustic options add performance without compromising aesthetic clarity.

### Texture Colors

Shapes offers 3D-printed textured surfaces that emulate natural materials such as travertine, wood, and earth. These textures may be applied to the outer profile, bringing depth, warmth, and a tactile design presence to the luminaire. Each texture is crafted to capture the richness of the original material while maintaining the durability and precision required for architectural lighting.


## PROFILE COLORS

	Powder Coated Matt Black		Powder Coated Light Green
	Powder Coated Matt White		Powder Coated Pure Green
	Powder Coated Bright Silver		Sand Blash Anodized Grey
	Powder Coated Black Grey		Sand Blash Painted Gold
	Powder Coated Slate Grey		Paint Spraying Yellow
	Powder Coated Telegrey 4		Sand Blash Painted Marsala Red
	Powder Coated Pearl Mouse Grey		Paint Spraying Marsala Red
	Powder Coated White Aluminium		Anodized Brush Black
	Powder Coated Greay White		Anodized Brush Grey
	Powder Coated Beige		Anodized Brush Rose Gold
	Powder Coated Sand Yellow		Anodized Brush Plating Copper
	Powder Coated Sulfur Yellow		Anodized Brush Gold (Bright)
	Powder Coated Signal Yellow		Anodized Brush Gold (Matt)
	Powder Coated Pastell Orange		Plating Gold
	Powder Coated Shinning Gold Color		Electrophoresis Gold Color
	Powder Coated Khakigrau		Electrophoresis Champagne Color
	Powder Coated Brown		Bead brasted broze with anti-fingerprint finishing
	Powder Coated Copper Color		PANTONE 7575C
	Powder Coated Black Red		We-transfer printing Wooden Gain
	Powder Coated Heather Violet Purple		
	Powder Coated Traffic Red		
	Powder Coated Matt Grey		
	Powder Coated Pastel Blue		
	Powder Coated Brilliant Blue		
	Powder Coated Signal Blue		



RAL - Custom RAL colors available upon request



## ACOUSTIC COLORS

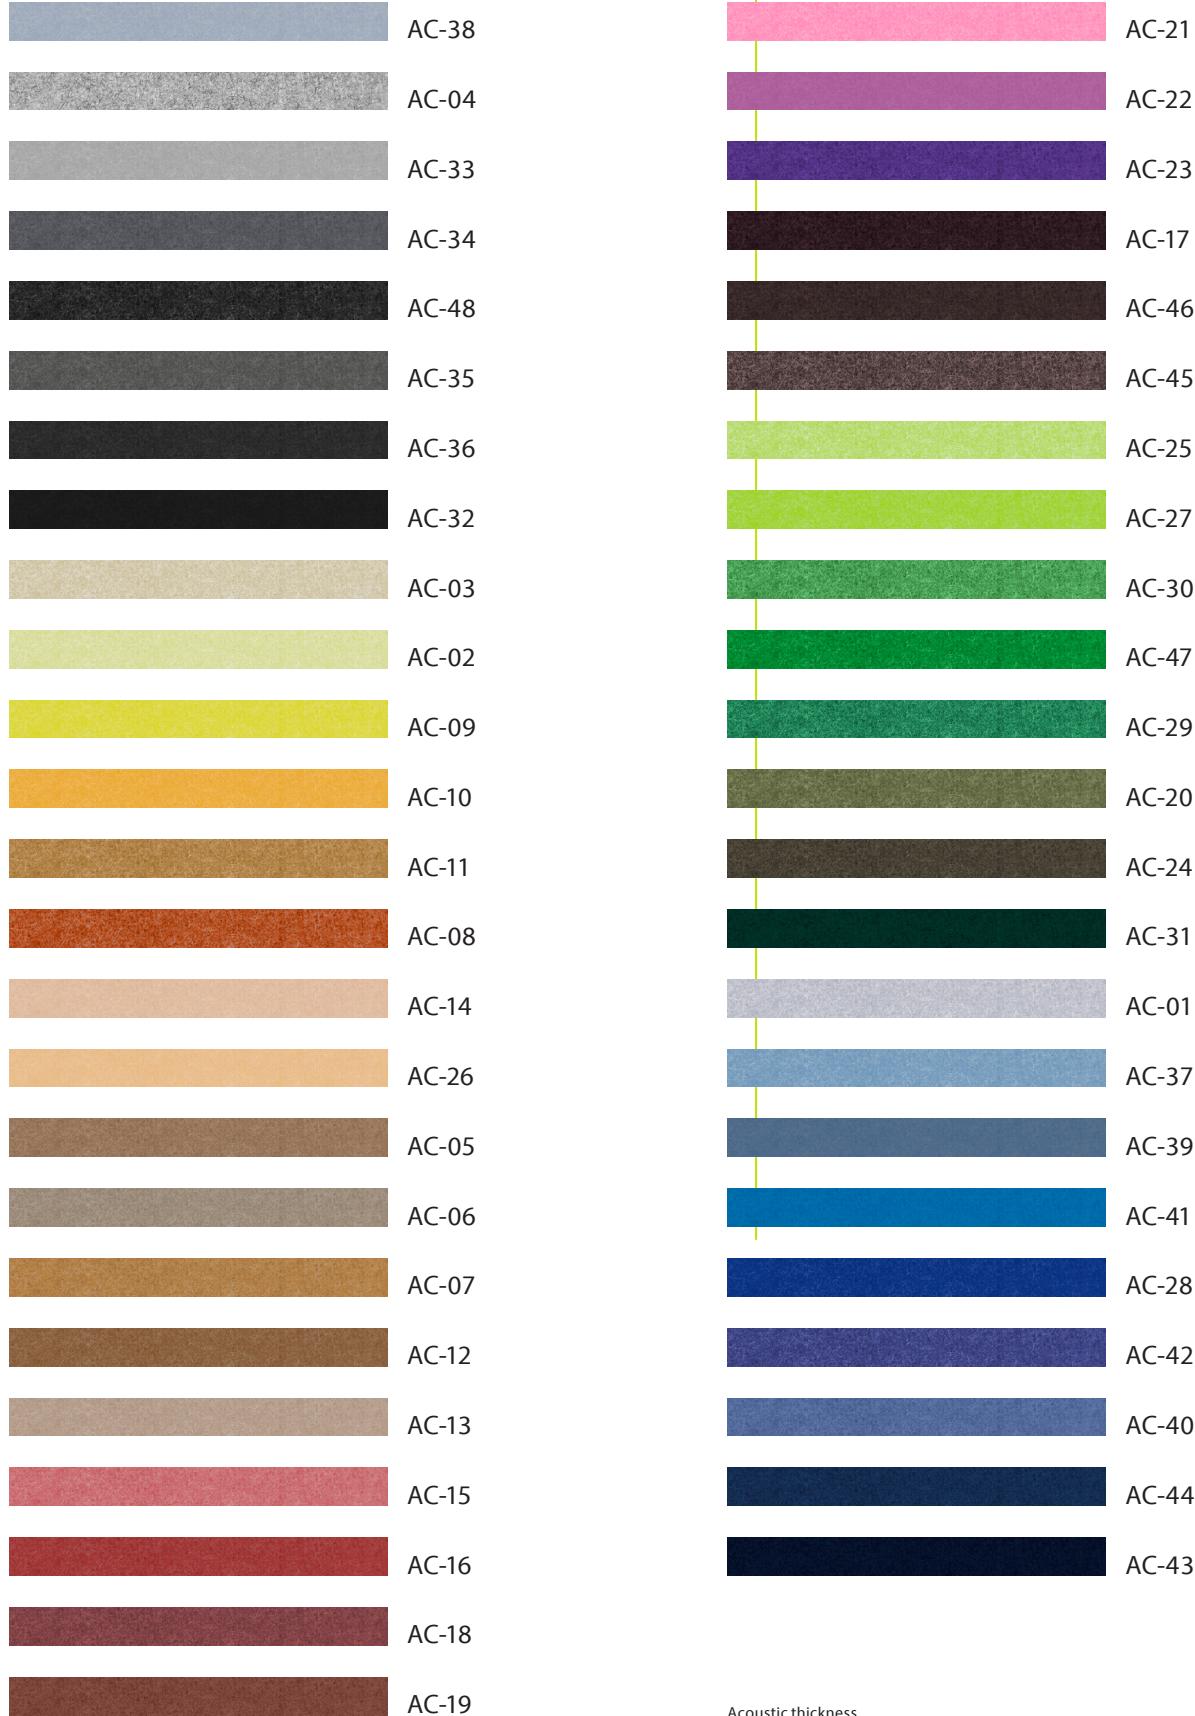

Acoustic thickness

3mm- when wrapped around profile  
9mm- acoustic center panel

## TEXTURE COLORS

	TX-01 3-5mm*		TX-26 2-7mm
	TX-02 3-5mm		TX-27 2-7mm
	TX-03 3-5mm		TX-28 2-7mm
	TX-04 3-5mm		TX-29 3-7mm
	TX-05 3-5mm		TX-30 3-5mm
	TX-06 3-5mm		TX-31 3-10mm
	TX-07 3-5mm		TX-32 3-5mm
	TX-08 3-7mm		TX-33 3-12mm
	TX-09 3-7mm		TX-34 3-12mm
	TX-10 3-10mm		TX-35 3-12mm
	TX-11 3-7mm		
	TX-12 3-12mm		
	TX-13 3-12mm		
	TX-14 3-12mm		
	TX-15 3-12mm		
	TX-16 4-6mm		
	TX-17 4-6mm		
	TX-18 3-6mm		
	TX-19 3-6mm		
	TE-20 4-8mm		
	TX-21 4-6mm		
	TX-22 3-5mm		
	TX-23 4-8mm		
	TX-24 3-6mm		
	TX-25 4-8mm		

\* Texture thickness

Type: 3-5mm the lowest thickness is 3mm and the highest thickness is 5mm.