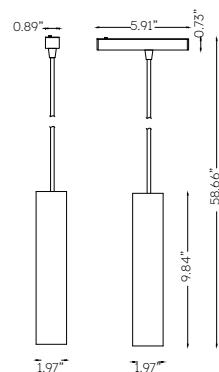


# MAGS MINI Ø2" PENDANT

MAGS Mini Series Magnetic Track, Pendant Light Fixture. Choice of black or white finish. CETL listed. 1.97 inches diameter x 9.84 inches height, 58 inch maximum overall height. 1 Light, 10 watt, Cree LED delivering 685 lumens. +90 CRI. Choice of 18, 24, or 36-degree beam spreads. Choice of 2700K, 3000K, 3500K, or 4000K CCT. Dimmable via 24V Volt Remote Driver, sold separately.



## Model Number Configuration

**MAGS-ES-P505**

---

**Optics**

- D18 - 18°
- D24 - 24°
- D36 - 36°

--

**CCT**

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K

--

**Finish**

- BL - Black
- WH - White

## Electrical

<b>Voltage</b>	24V
<b>Dimming</b>	Driver dependent
<b>Power</b>	10W
<b>Lumens</b>	685
<b>Power factor</b>	N/A

## Environmental

<b>CRI</b>	>90
<b>Environment</b>	Dry
<b>Light Source</b>	LED
<b>Chip</b>	Cree
<b>Life rating</b>	N/A
<b>Listings</b>	C-ETL Listed to UL1598




## Mechanical

<b>Installation</b>	N/A
<b>Cord Length</b>	N/A
<b>Dimensions</b>	1.97" Dia x 9.84"H, 58" maximum overall height
<b>Weight</b>	N/A
<b>Material</b>	Aluminum
<b>Finish</b>	Powder Coated

## Driver Options

<b>Driver code</b>	PS-96-24-UNI-UNI - Universal input (120-277V) and Universal dimming (ELV, TRIAC, 0-10V) 0-100% dimming. Up to 20 Small or 10 Large Pendants. PS-60-ELV - 60W, 24V Power Supply. 120V Only with ELV Dimming to 10%. Fits in 4x4 Rectangular Junction Box.
--------------------	--

## Photometric and Light Distribution

**18D****18°****24D****30°****36D****36°**

h(m)	E(lx)	Φ(m)
1	4902	Φ0.32
2	1226	Φ0.65
3	544	Φ0.98
4	306	Φ1.31
5	196	Φ1.63

h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81

h(m)	E(lx)	Φ(m)
1	2077	Φ0.64
2	519	Φ1.29
3	230	Φ1.94
4	129	Φ2.58
5	83	Φ3.23